




NEVO
ONE-STOP-SHOP

**DEMOLITION
TOOLS**
Jobs

DEMOLITION

12-25 TON

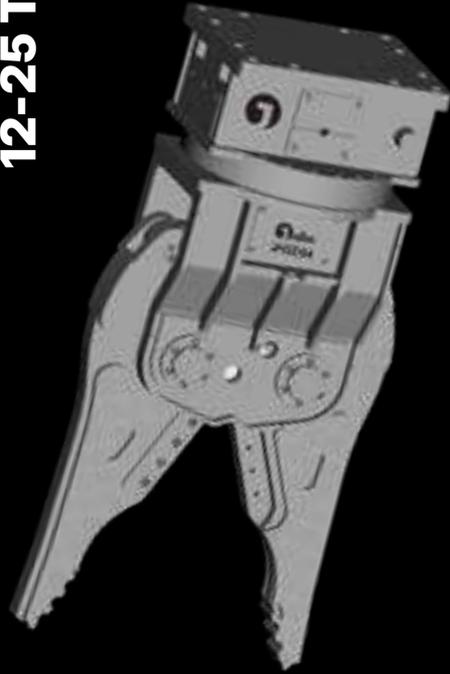

**CAR
DISMANTLING**

0.4-140 TON



**HYDRAULIC
HAMMER**

5-35 TON



**HYDRAULIC
THUMB**

6-45 TON



**DOUBLE CYLINDER
CRUSHER**

3-80 TON



**HYDRAULIC
EAGLE SHEAR**

5-40 TON



**ROTATING
PULVERIZER**

6-35 TON



PULVERIZER

20-30 TON

2.5-35 TON



**ROTATING
GRAPPLE**

STOOL TOOLS

FEATURES

Stable & Reliable

Zero-failure rate design philosophy.

High Practicality with low vibration.

Suitable for multiple working conditions.


ABF System

The ABF system (Anti-Blank Fire System) prevents blank firing, protecting the hydraulic hammer while improving durability, reducing vibrations, lowering maintenance needs and maximizing operational efficiency.

For Underwater Work

Hydraulic hammers can be easily equipped with an optional kit for underwater operation.

| | | J35 | J40 | J45 | J53 | J60 | J68 | J75 | J80 | J85 | J100 | J125 | J135F | J140A | J150 |
|-------------------------|-----|-------|---------|-------|---------|-----|-----|-----|-----|------|-------|-------|-------|-------|-------|
| Breaker Weight | Kg | 86.5 | 96 | 123 | 160.6 | 213 | 269 | 344 | 344 | 530 | 779 | 1040 | 1409 | 1599 | 1924 |
| Suitable Carrier | Ton | 0.4-2 | 0.8-2.5 | 1.2-3 | 2.5-4.5 | 4-6 | 4-7 | 6-9 | 6-9 | 7-14 | 10-15 | 15-18 | 18-26 | 18-26 | 27-35 |

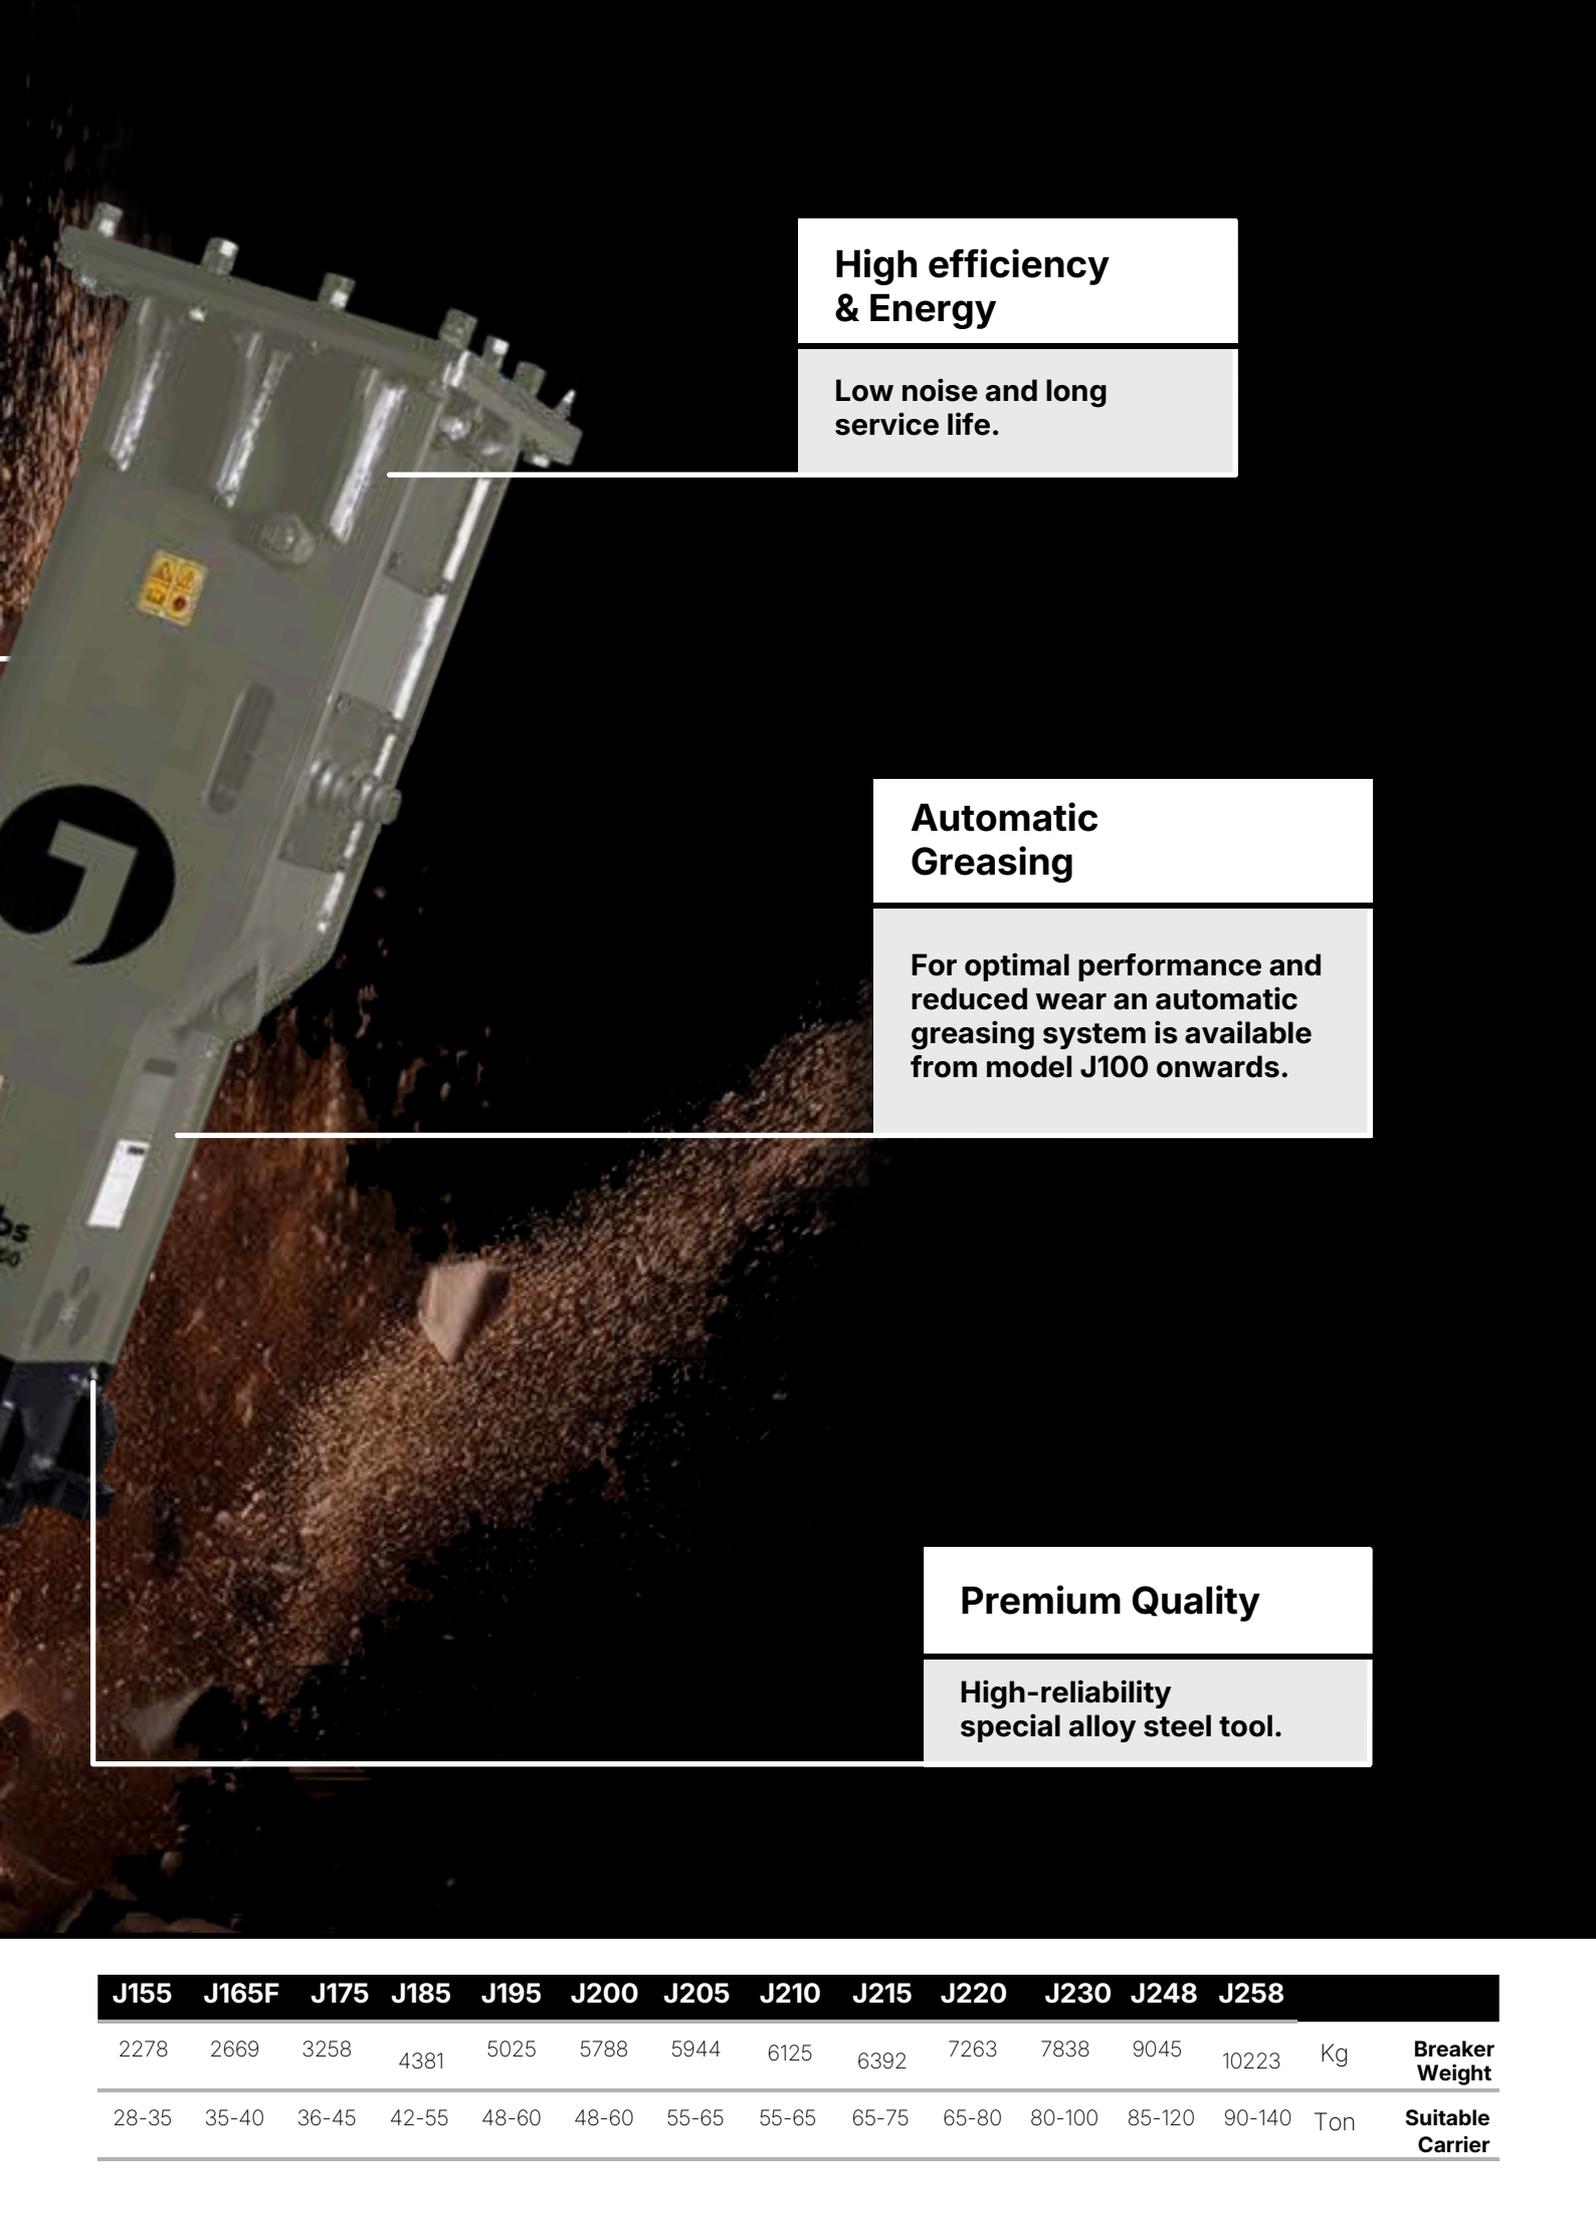

High efficiency & Energy

Low noise and long
service life.

Automatic Greasing

For optimal performance and
reduced wear an automatic
greasing system is available
from model J100 onwards.

Premium Quality

High-reliability
special alloy steel tool.

| J155 | J165F | J175 | J185 | J195 | J200 | J205 | J210 | J215 | J220 | J230 | J248 | J258 | | |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|-----|-----------------------------|
| 2278 | 2669 | 3258 | 4381 | 5025 | 5788 | 5944 | 6125 | 6392 | 7263 | 7838 | 9045 | 10223 | Kg | Breaker Weight |
| 28-35 | 35-40 | 36-45 | 42-55 | 48-60 | 48-60 | 55-65 | 55-65 | 65-75 | 65-80 | 80-100 | 85-120 | 90-140 | Ton | Suitable Carrier |

HYDRAULIC HAMMER




J35-J100 For equipment from 0.4 to 15 ton



| | | | J35 | J40 | J45 | J53 | J60 | J68 | J75 | J80 | J85 | J100 |
|--|--------------------|--|----------|----------|----------|----------|----------|----------|----------|----------|----------|---------|
| Breaker Weight | Kg | | 86.5 | 96 | 123 | 160.6 | 213 | 269 | 344 | 344 | 530 | 779 |
| Service Weight (breaker+tool, without bracket) | Kg | | 89.5 | 100 | 131 | 169.6 | 225 | 287 | 368 | 368 | 370 | 808 |
| Diameter of Tool G | mm | | 35 | 40 | 45 | 53 | 60 | 68 | 75 | 80 | 85 | 100 |
| Operating Pressure | Kg/cm ² | | 90-120 | 90-120 | 90-120 | 90-120 | 100-130 | 110-140 | 120-150 | 120-150 | 130-160 | 150-170 |
| Hydraulic Flow Range | Lt./min | | 12-20 | 15-25 | 20-30 | 25-50 | 30-60 | 40-70 | 50-90 | 50-90 | 60-100 | 80-110 |
| Impact Frequency | bpm | | 800-1400 | 800-1400 | 700-1200 | 600-1100 | 600-1100 | 500-900 | 400-800 | 400-800 | 400-800 | 350-700 |
| Impact Energy | J | | 170 | 170 | 240 | 320 | 450 | 630 | 1110 | 1150 | 1190 | 1720 |
| Counterpressure | bar | | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Noise Level | dB | | 118 | 118 | 119 | 119 | 119 | 119 | 123 | 123 | 119 | 123 |
| Diameter of Hose | mm | | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 19.05 | 19.05 |
| Length A | mm | | 1016 | 1090 | 1207 | 1180 | 1223 | 1390 | 1482 | 1482 | 1709 | 2005 |
| Weight B | mm | | 260 | 260 | 260 | 260 | 294 | 328 | 328 | 328 | 440 | 440 |
| Height C | mm | | 298 | 298 | 298 | 298 | 360 | 400 | 400 | 400 | 520 | 520 |
| Body Length D | mm | | 667 | 743 | 811 | 880 | 904 | 1011 | 1064 | 1064 | 1318 | 1459 |
| Low Height E | mm | | 186 | 186 | 216 | 231 | 241 | 268 | 305 | 305 | 344 | 397 |
| Low Width F | mm | | 163 | 163 | 175 | 185 | 199 | 216 | 229 | 229 | 277 | 335 |
| Suitable Carrier | m ³ | | 0.05 | 0.07 | 0.03-0.1 | 0.06-0.2 | 0.1-0.25 | 0.15-0.3 | 0.2-0.35 | 0.2-0.35 | 0.25-0.5 | 0.4-0.6 |
| Suitable Carrier | Ton | | 0.4-2 | 0.8-2.5 | 1.2-3 | 2.5-4.5 | 4-6 | 4-7 | 6-9 | 6-9 | 7-14 | 10-15 |
| Valve Type | | | Inward | Inward |
| Accumulator Exist | | | No | No |
| Acc. Volume | m ³ | | - | - | - | - | - | - | - | - | - | - |

LIGHT RANGE

PRODUCTION VOLUME

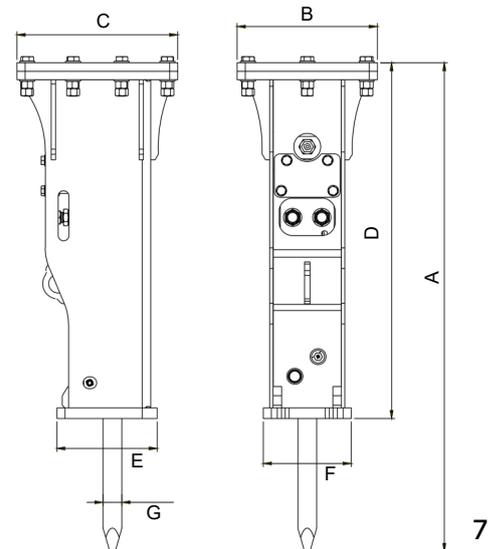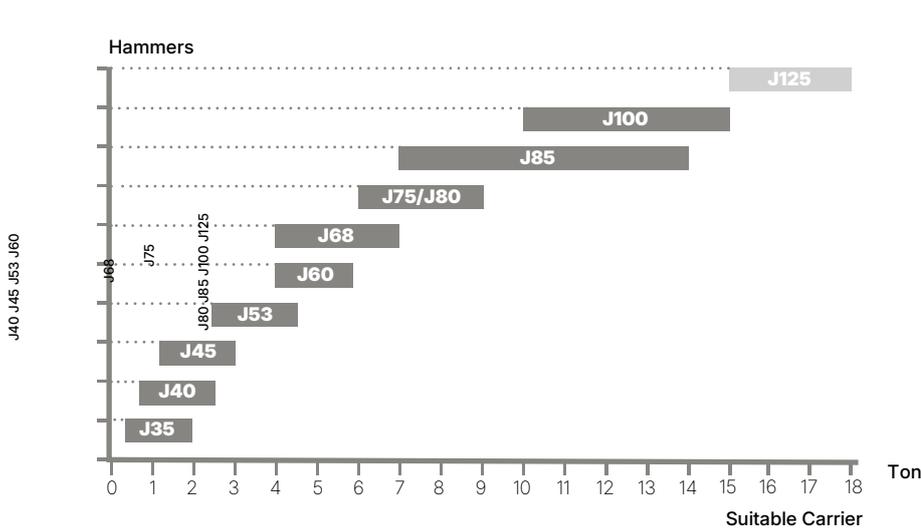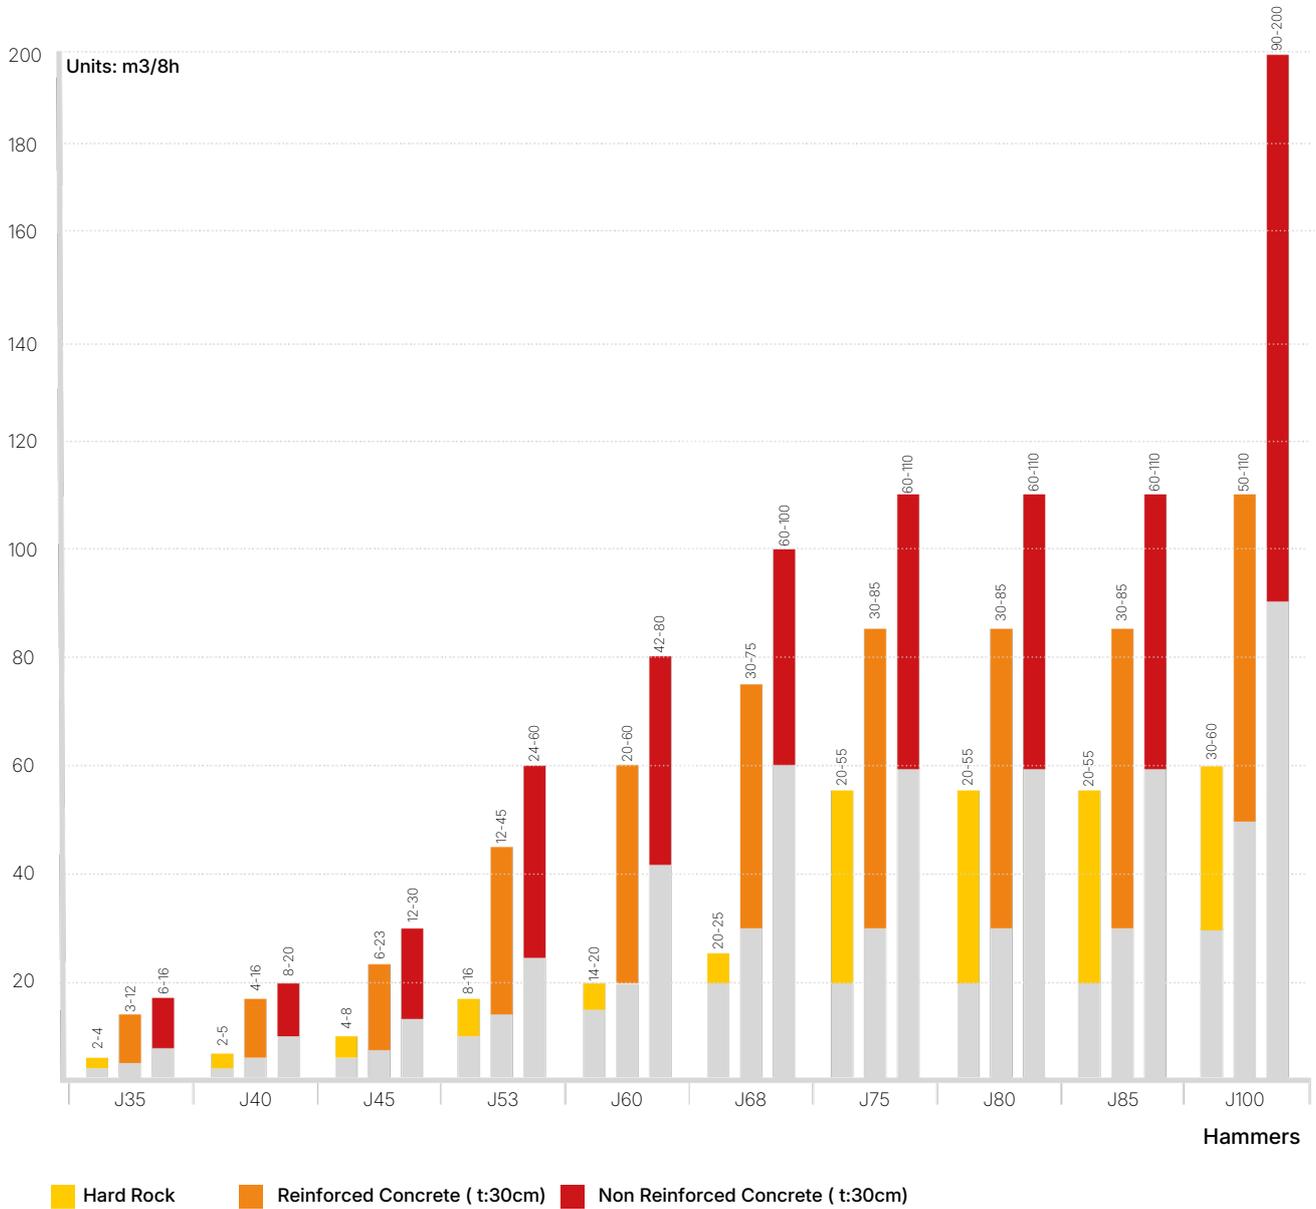

HYDRAULIC HAMMER

J125-J165F



For equipment from
15 to 40 ton



| | | J125 | J135F | J140A | J150 | J155 | J165F |
|--|---------|---------|---------|---------|---------|---------|---------|
| Breaker Weight | Kg | 1040 | 1409 | 1599 | 1924 | 2278 | 2669 |
| Service Weight (breaker +tool, without bracket) | Kg | 1134 | 1524 | 1725 | 2081 | 2468 | 2884 |
| Diameter of Tool G | mm | 125 | 135 | 140 | 150 | 155 | 165 |
| Operating Pressure | Kg/cm2 | 150-170 | 160-180 | 160-180 | 160-180 | 160-180 | 160-180 |
| Hydraulic Flow Range | Lt./min | 90-120 | 145-180 | 120-180 | 150-190 | 180-240 | 200-250 |
| Impact Frequency | bpm | 350-650 | 360-460 | 350-550 | 350-700 | 300-450 | 200-380 |
| Impact Energy | j | 2530 | 3900 | 4200 | 4826 | 6791 | 11833 |
| Counterpressure | bar | 10 | 10 | 10 | 10 | 10 | 10 |
| Noise Level | dB | 124 | 124 | 118 | 119 | 113 | 130 |
| Diameter of Hose | mm | 25.4 | 25.4 | 25.4 | 25.4 | 31.75 | 31.75 |
| Lenght A | mm | 2255 | 2262 | 2473 | 2587 | 2739 | 3003 |
| Weight B | mm | 498 | 560 | 560 | 640 | 640 | 654 |
| Height C | mm | 640 | 680 | 710 | 720 | 766 | 790 |
| Body Length D | mm | 1604 | 1612 | 1750 | 1811 | 1966 | 2183 |
| Low Height E | mm | 448 | 455 | 506 | 540 | 586 | 605 |
| Low Width F | mm | 345 | 386 | 400 | 451 | 468 | 478 |
| Suitable Carrier | m3 | 0.5-0.7 | 0.6-0.8 | 0.7-0.9 | 0.9-1.2 | 1.1-1.4 | 1.2-1.6 |
| Suitable Carrier | Ton | 15-18 | 18-26 | 18-26 | 27-35 | 28-35 | 35-40 |
| Valve Type | | Inward | Outward | Inward | Outward | Inward | Inward |
| Accumulator Exist | | No | Yes | Yes | Yes | Yes | Yes |
| Acc. Volume | m3 | - | 0,0013 | 0,0013 | 0,0016 | 0,0016 | 0,0016 |



MEDIUM RANGE

PRODUCTION VOLUME

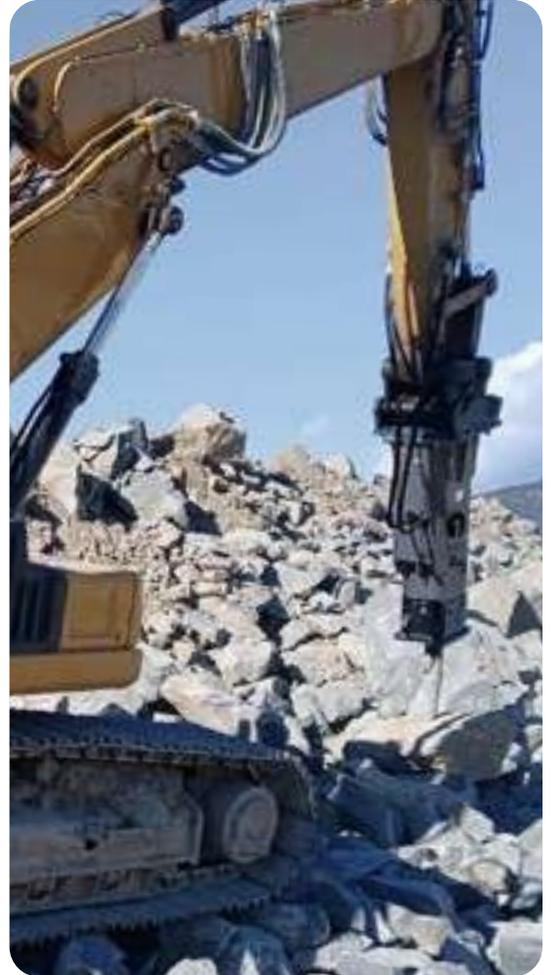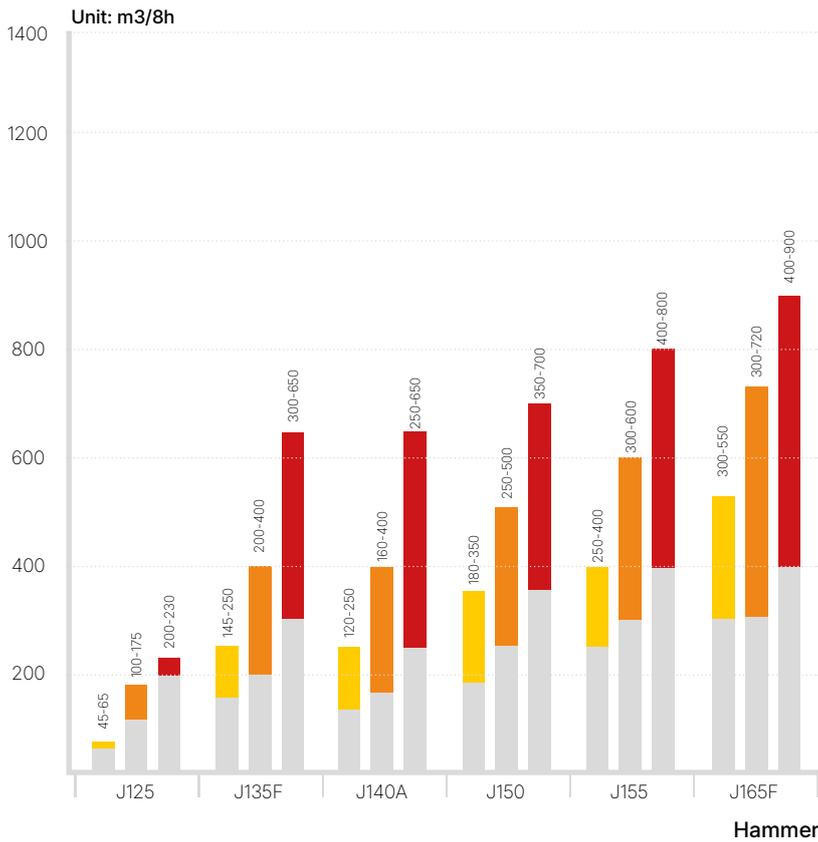

■ Hard Rock
 ■ Reinforced Concrete (t:30cm)
 ■ Reinforced Concrete (t:30cm)

Hammers

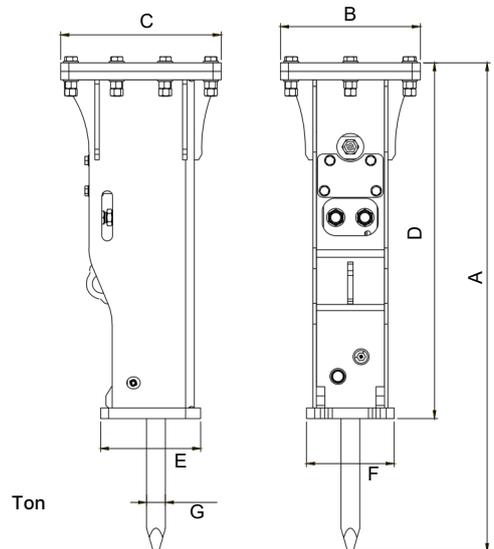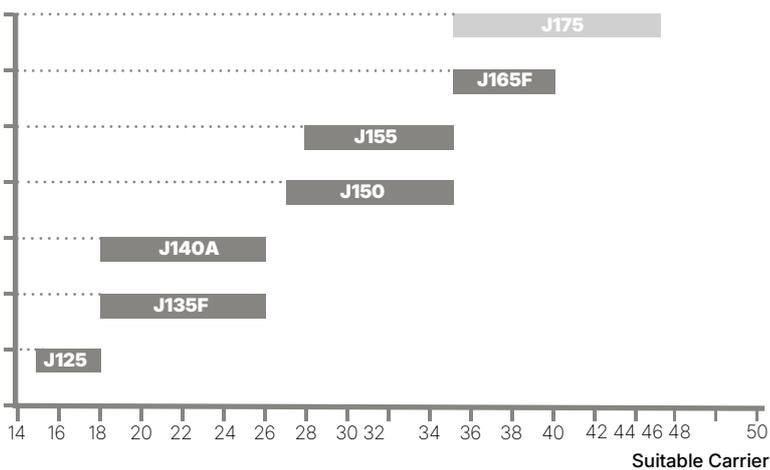

Ton

HYDRAULIC HAMMER

J175-J200


For equipment from 36 to 60 ton





| | | J175 | J185 | J195 | J200 |
|---|---------|---------|---------|---------|---------|
| Breaker Weight | Kg | 3258 | 4381 | 5025 | 5788 |
| Service Weight | Kg | 3513 | 4668 | 5329 | 6103 |
| <small>(breaker +tool, without bracket)</small> | | | | | |
| Diameter of Tool G | mm | 175 | 185 | 195 | 200 |
| Operating Pressure | Kg/cm2 | 160-180 | 180-220 | 200-240 | 200-240 |
| Hydraulic Flow Range | Lt./min | 200-260 | 240-300 | 290-360 | 300-370 |
| Impact Frequency | bpm | 200-300 | 180-250 | 150-200 | 150-200 |
| Impact Energy | j | 12736 | 18197 | 24060 | 26064 |
| Counterpressure | bar | 10 | 10 | 10 | 10 |
| Noise Level | dB | 131 | 132 | 132 | 133 |
| Diameter of Hose | mm | 31.75 | 31.75 | 31.75 | 31.75 |
| Lenght A | mm | 3207 | 3343 | 3490 | 3492 |
| Weight B | mm | 670 | 760 | 800 | 800 |
| Height C | mm | 860 | 940 | 990 | 1000 |
| Body Length D | mm | 2360 | 2586 | 2700 | 2718 |
| Low Height E | mm | 613 | 610 | 630 | 656 |
| Low Width F | mm | 516 | 514 | 550 | 550 |
| Suitable Carrier | m3 | 1.4-1.8 | 2.0-3.5 | 3.0-4.0 | 3.0-4.0 |
| Suitable Carrier | Ton | 36-45 | 42-55 | 48-60 | 48-60 |
| Valve Type | | Inward | Outward | Outward | Outward |
| Accumulator Exist | | Yes | Yes | Yes | Yes |
| Acc. Volume | m3 | 0,0018 | 0,0031 | 0,0050 | 0,0050 |

HEAVY RANGE

PRODUCTION VOLUME

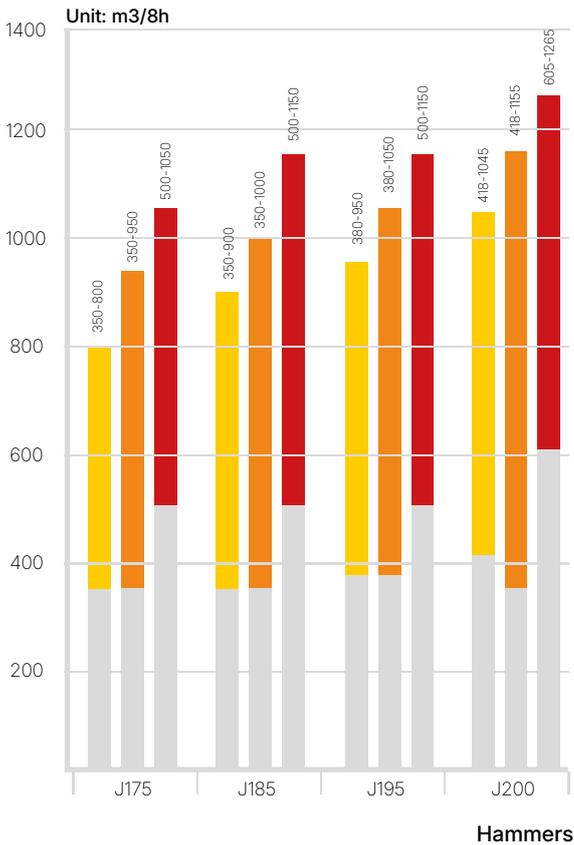

■ Hard Rock
 ■ Reinforced Concrete (t:30cm)
 ■ Reinforced Concrete (t:30cm)

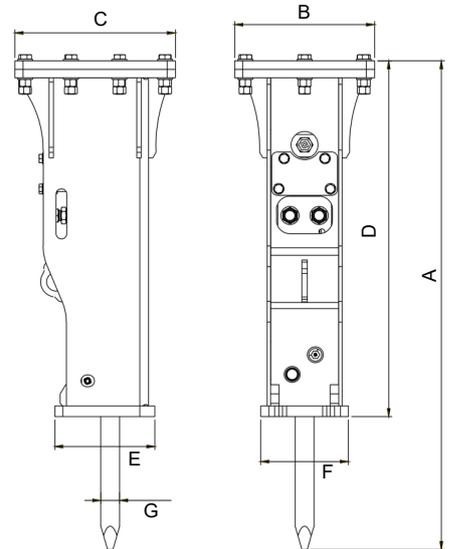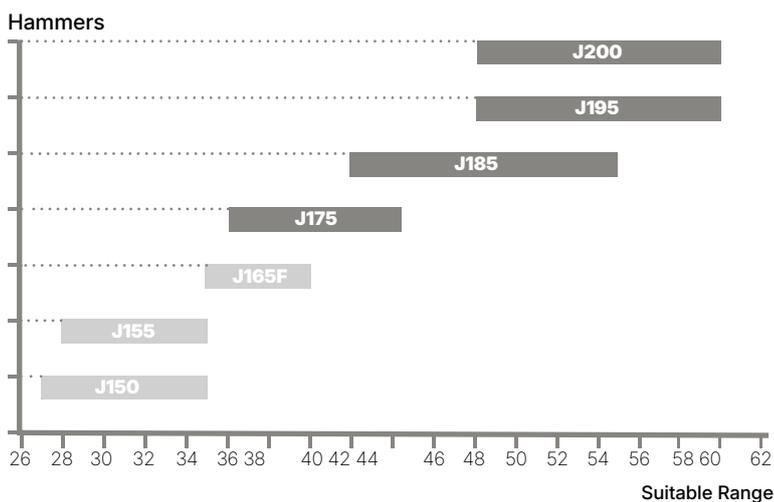

Ton

HYDRAULIC HAMMER

J205-J258


For equipments from
55 to 140 ton



| | | J205 | J210 | J215 | J220 | J230 | J248 | J258 |
|--------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Breaker Weight | Kg | 5944 | 6125 | 6392 | 7263 | 7838 | 9045 | 10223 |
| Service Weight | Kg | 6291 | 6490 | 6776 | 7690 | 8317 | 9635 | 10885 |
| (breaker + tool, without bracket) | | | | | | | | |
| Diameter of Tool G | mm | 205 | 210 | 215 | 220 | 230 | 248 | 258 |
| Operating Pressure | Kg/cm2 | 230-260 | 230-260 | 230-260 | 230-260 | 230-260 | 230-260 | 230-260 |
| Hydraulic Flow Range | Lt./min | 320-390 | 340-420 | 360-460 | 400-500 | 420-540 | 450-550 | 500-600 |
| Impact Frequency | bpm | 130-170 | 130-170 | 130-170 | 130-170 | 130-170 | 110-150 | 110-140 |
| Impact Energy | j | 28512 | 32136 | 35122 | 38458 | 42736 | 53724 | 67654 |
| Counterpression | bar | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Noise Level | dB | 133 | 133 | 133 | 133 | 133 | 133 | 133 |
| Diameter of Hose | mm | 38.1 | 38.1 | 38.1 | 38.1 | 38.1 | 38.1 | 38.1 |
| Lenght A | mm | 3802 | 3890 | 3894 | 4021 | 4091 | 4192 | 4360 |
| Weight B | mm | 870 | 870 | 870 | 870 | 1000 | 1000 | 1000 |
| Height C | mm | 1080 | 1080 | 1080 | 1080 | 1250 | 1250 | 1250 |
| Body Length D | mm | 2912 | 2991 | 3041 | 3224 | 3197 | 3332 | 3447 |
| Low Height E | mm | 660 | 660 | 670 | 670 | 730 | 750 | 780 |
| Low Width F | mm | 550 | 550 | 560 | 560 | 590 | 620 | 650 |
| Suitable Carrier | m3 | 3.5-4.5 | 3.5-4.5 | 3.5-5 | 4-6 | 5.5-8 | 6-9 | 6-10 |
| Suitable Carrier | Ton | 55-65 | 55-65 | 65-75 | 65-80 | 80-100 | 85-120 | 90-140 |
| Valve Type | | Outward |
| Accumulator Exist | | Yes |
| Acc. Volume 12 | m3 | 0,0061 | 0,0061 | 0,0061 | 0,0061 | 0,0068 | 0,0098 | 0,0098 |



EXTRA HEAVY RANGE

PRODUCTION VOLUME

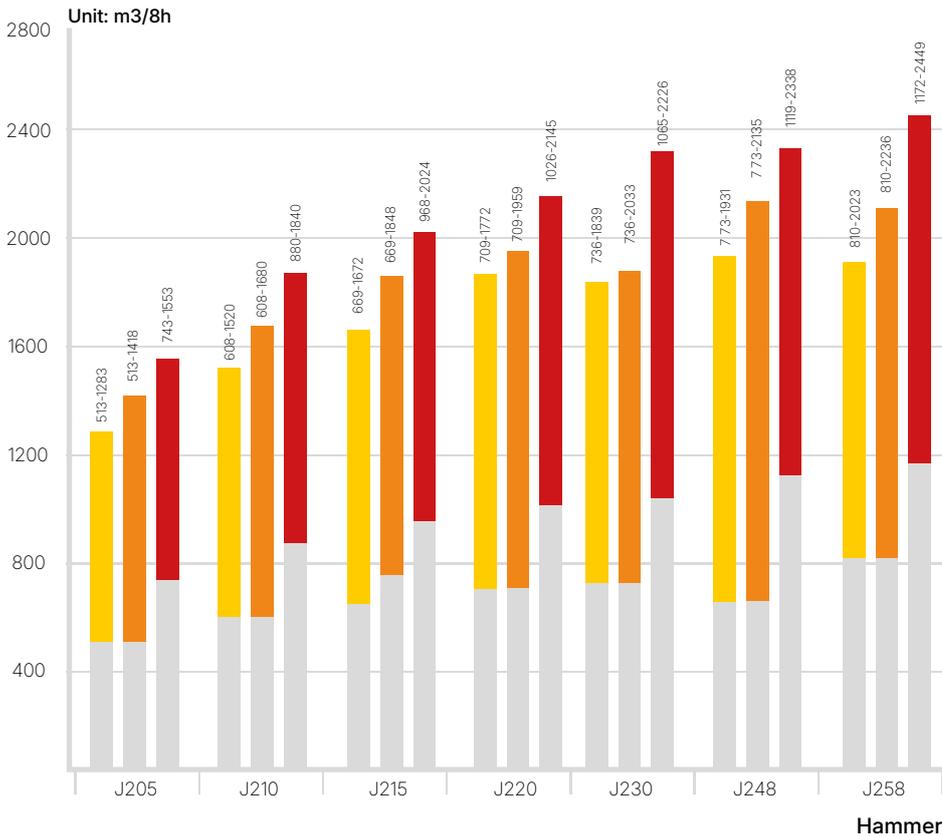

■ Hard Rock
 ■ Reinforced Concrete (t:30cm)
 ■ Non Reinforced Concrete (t:30cm)

Hammers

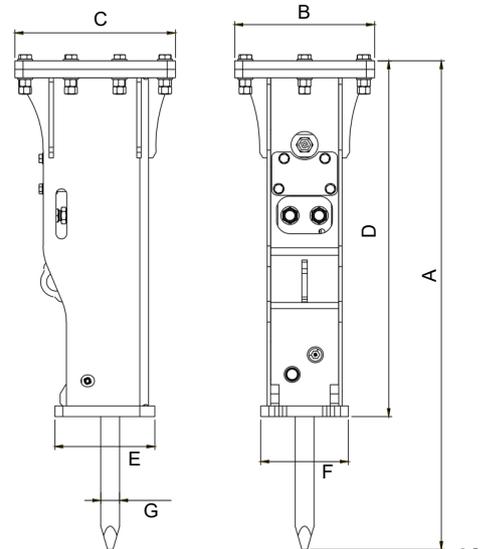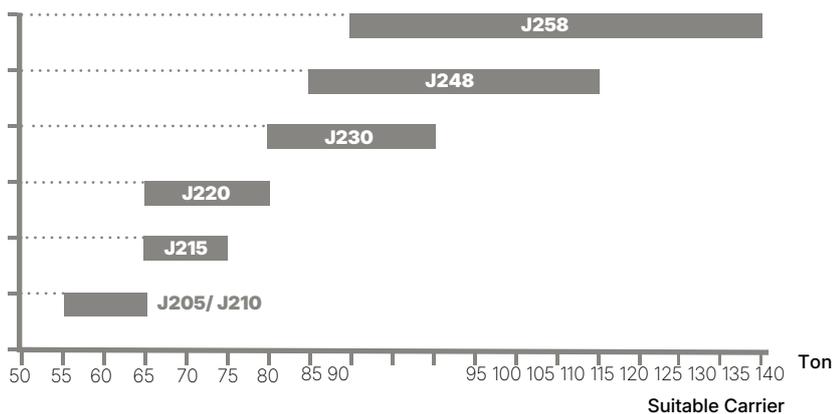

ACCESSORIES

Automatic Greasing



Total elimination of manual lubrication

Metered grease + continuous → 0 stops

Longer service life of hammer and wear parts

Underwater Kit



Quick conversion for underwater work

Compressed air through integrated port (all models)

Blocks water ingress → stable performance

Specials Kits



Extreme temperatures (heat / cold)

Super-dusty environments

Tunnel operations

» EACH HYDRAULIC HAMMER INCLUDES

Charging Kit



J35- J100

J125- J258


Tool Box



Base Plate




2 Breaker Tools

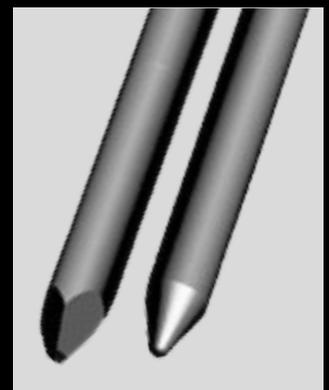


BREAKER TOOLS


Pyramid



Conical



Includes

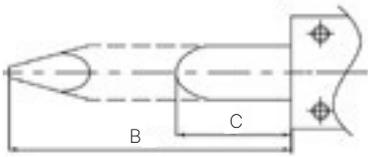

C and B is the outside length when the tool is fully pushed into the body.

Compatible with all types of hydraulic breaker tools


| | J35 | J40 | J45 | J53 | J60 | J68 | J75 | J80 | J85 | J100 | J125 | J135F | J140A | J150 |
|----------------|--------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-------|-------|------|
| Diameter (A) | mm 35 | 40 | 45 | 53 | 60 | 68 | 75 | 80 | 85 | 100 | 125 | 135 | 140 | 150 |
| Weight of Tool | Kg 3 | 4 | 8 | 9 | 12 | 18 | 24 | 26 | 29 | 57 | 94 | 115 | 126 | 157 |
| Length (L) | mm 500 | 530 | 600 | 580 | 600 | 700 | 755 | 755 | 745 | 1000 | 1130 | 1200 | 1300 | 1300 |
| Length (B) | mm 379 | 377 | 426 | 330 | 359 | 428 | 468 | 468 | 441 | 601 | 716 | 730 | 803 | 856 |
| Length (C) | mm 200 | 200 | 200 | 200 | 200 | 250 | 250 | 250 | 250 | 250 | 300 | 300 | 400 | 400 |

| | J155 | J165F | J175 | J185 | J195 | J200 | J205 | J210 | J215 | J220 | J230 | J248 | J258 |
|----------------|---------|-------|------|------|------|------|------|------|------|------|------|------|------|
| Diameter (A) | mm 155 | 165 | 175 | 185 | 195 | 200 | 205 | 210 | 215 | 220 | 230 | 248 | 258 |
| Weight of Tool | Kg 190 | 215 | 255 | 287 | 304 | 315 | 347 | 365 | 384 | 427 | 479 | 590 | 662 |
| Length (L) | mm 1500 | 1500 | 1600 | 1600 | 1650 | 1650 | 1800 | 1800 | 1800 | 1800 | 1900 | 1900 | 2000 |
| Length (B) | mm 853 | 900 | 927 | 907 | 940 | 924 | 1040 | 1045 | 1003 | 948 | 1044 | 1010 | 1039 |
| Length (C) | mm 500 | 500 | 550 | 600 | 600 | 600 | 600 | 600 | 550 | 600 | 580 | 640 | 640 |

» APPLICATIONS

| | | | | | | |
|---|-----------------------------------|---------------------------------------|--|---------------------------------|-------------------------------------|--|
| Conical Point Concrete | Pyramid Rock | Chisel Trenching | Wide Chisel Asphalt | Blunt Rock | Big Blunt Rock | Diving Tool Pile Driver |
|---|-----------------------------------|---------------------------------------|--|---------------------------------|-------------------------------------|--|

HAMMER PARTS

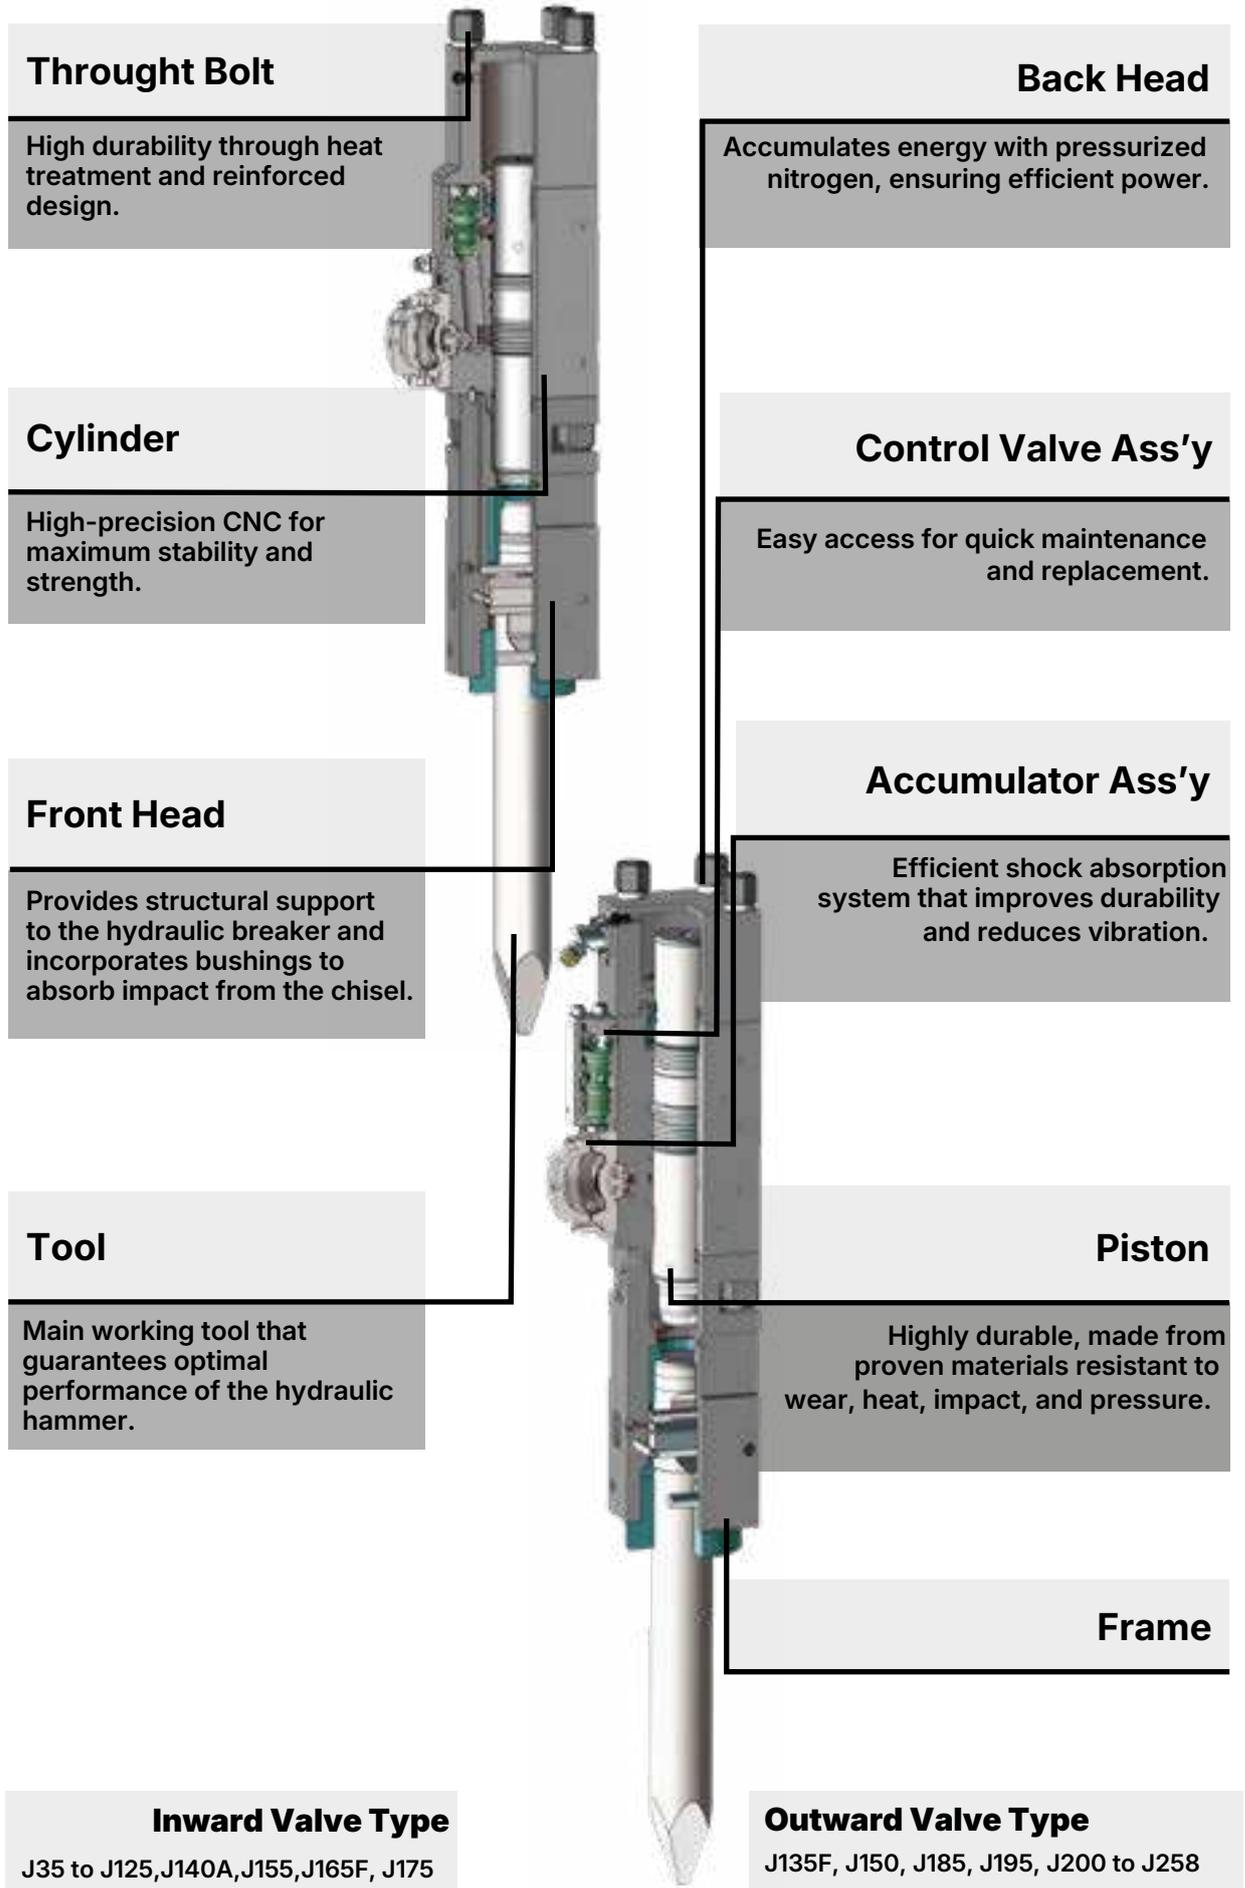

APPLICATIONS

| Applications | Materials | Light J35-J100 | Medium J125-J165F | Heavy J175-J200 | Extra Heavy J205-J258 | |
|------------------------|---|-------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Mining and Quarries |  | Secondary Demolition | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | | Hard Rock Work | — | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | | Preliminary Work | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Demolition |  | Concrete Structures | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | Concrete and Steel Structures | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | | Pavements | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Construction |  | Road Works | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | | Road Leveling | — | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | | Piling | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Metallurgical Industry |  | Slag Reduction | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | | Crushing Systems | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Optimal
 Suitable
 — Not Suitable



Quality

We ensure maximum efficiency and durability under demanding conditions.



Expertise

Years of demolition experience, delivering top performance solutions.



Specialized Technical Support

We help you to choose the ideal model according to your type of work and machinery.



Availability of Spare Parts

Permanent stock of spare parts to minimize downtime.



Professionalism

We provide clear information on equipment use, care and optimization.



Longer Service Life

Reinforced design for longer life and lower operating cost.

COMMITMENT

DOUBLE CYLINDER CRUSHER

JSDH56-JSDH320

For equipments from 6 to 45 ton

Application

Designed for the demolition of reinforced concrete buildings and heavy industrial structures, including bridges, hardened concrete walls, and high-rise buildings. Suitable for large-scale structures that require a robust and efficient machine.

Key Features

- **HARDOX Steel:** Built for maximum strength and durability.
- **Integrated Rebar Cutting:** Rear jaw blades allow easy cutting of reinforcing steel within concrete.
- **360° Rotation:** Full rotation for complete maneuverability.
- **Speed Valve Cylinders:** Ensure fast and efficient work cycles.




| | | JSDH56 | JSDH130 | JSDH200 | JSDH290 | JSDH320 |
|------------------------------|-------------------|---------|---------|---------|---------|---------|
| Body Weight | Kg | 535 | 1300 | 2230 | 2320 | 4032 |
| Blade Length | mm | 135 | 180 | 200 | 200 | 240 |
| Max Opening | mm | 600 | 630 | 1060 | 1100 | 1485 |
| Rotation Diameter | mm | φ360 | φ593 | φ752 | φ752 | φ806 |
| Working Flow | Lt./min | 100-150 | 160-250 | 230-280 | 230-280 | 300-350 |
| Working Pressure | Kg/m ² | 250-280 | 260-300 | 300-320 | 300-320 | 300-320 |
| Cylinder Diameter | mm | 160/203 | 220/273 | 260/320 | 280/345 | 310/377 |
| Cylinder Rod Diameter | mm | 110 | 140 | 180 | 190 | 220 |
| Suitable for | ton | 6-9 | 12-18 | 20-30 | 25-35 | 30-45 |

DOUBLE CYLINDER CRUSHER

» SUITABLE FOR

Doble Cylinder Crusher

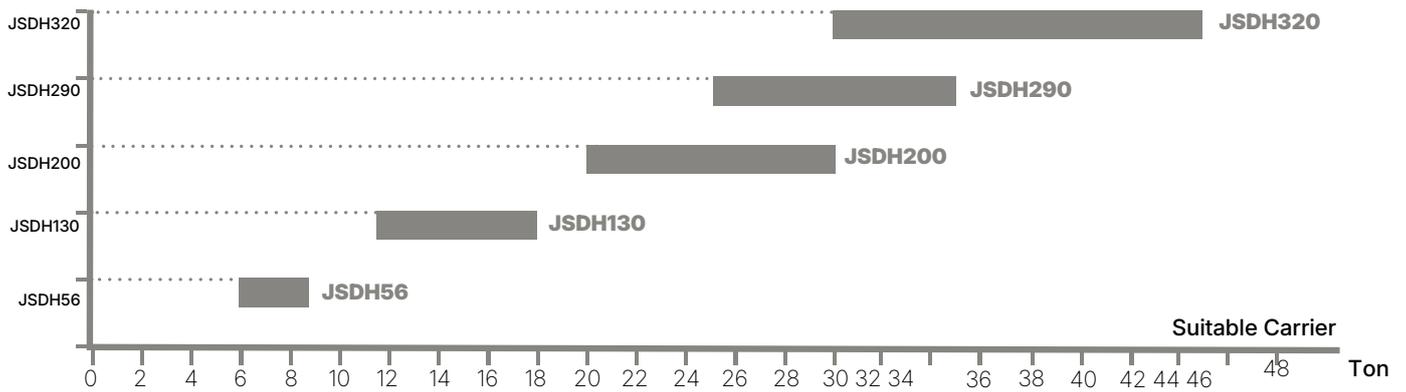

HYDRAULIC EAGLE SHEAR

JSH42-JSH850

For equipments from 3 to 80 ton

Application

Designed for the demolition of steel structures, towers, and industrial buildings, as well as the processing of heavy trucks, ship hulls, and metal scrap. Ideal for scrap processing plants and resource recycling centers.

Key Features


- **360° Rotating Hydraulic Unit** for maximum cutting efficiency.
- **Reverse-Mounted Hydraulic Cylinder** with Speed Valve for high-performance operation.
- **HARDOX Steel Construction** providing exceptional cutting force.
- **High Strength, Reliable Performance, and Long Service Life** for demanding industrial use.



| | | JSH42 | JSH58 | JSH135 | JSH245 | JSH380 | JSH560 | JSH610 | JSH650 | JSH850 |
|--------------------------|-------------------|----------|----------|----------|----------|----------------|----------------|----------------|----------------|----------------|
| Body Weight | Kg | 255 | 580 | 1350 | 2450 | 3800/4200 | 5600/5900 | 6100/6500 | 6600/6900 | 8500/8900 |
| Max Opening | mm | 208 | 302 | 389 | 500 | 600 | 663 | 702 | 816 | 922 |
| Cutting depth | mm | 234 | 311 | 417 | 530 | 630 | 680 | 729 | 800 | 900 |
| Rotation Diameter | mm | φ180 | φ360 | φ593 | φ752 | φ806 | φ922 | φ922 | φ922 | φ1022 |
| Working Flow | Lt./min | 60 | 100 | 150 | 180-220 | 200-250 | 250-300 | 250-300 | 250-300 | 300-360 |
| Working Pressure | Kg/m ² | 800-1400 | 800-1400 | 700-1200 | 600-1100 | 600-1100 | 500-900 | 400-800 | 400-800 | 400-800 |
| Impact Energy | j | 170 | 170 | 240 | 320 | 450 | 630 | 1110 | 1150 | 1190 |
| Counterpressure | bar | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Noise Level | dB | 118 | 118 | 119 | 119 | 119 | 119 | 123 | 123 | 119 |
| Diameter of Hose | mm | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 12.7 | 19.05 |
| Suitable for | ton | 3-5 | 6-9 | 12-18 | 20-28 | 30-38 20-28 | 36-45 26-45 | 40-50 30-50 | 46-60 30-60 | 60-80 50-80 |

HYDRAULIC EAGLE SHEAR

» SUITABLE FOR

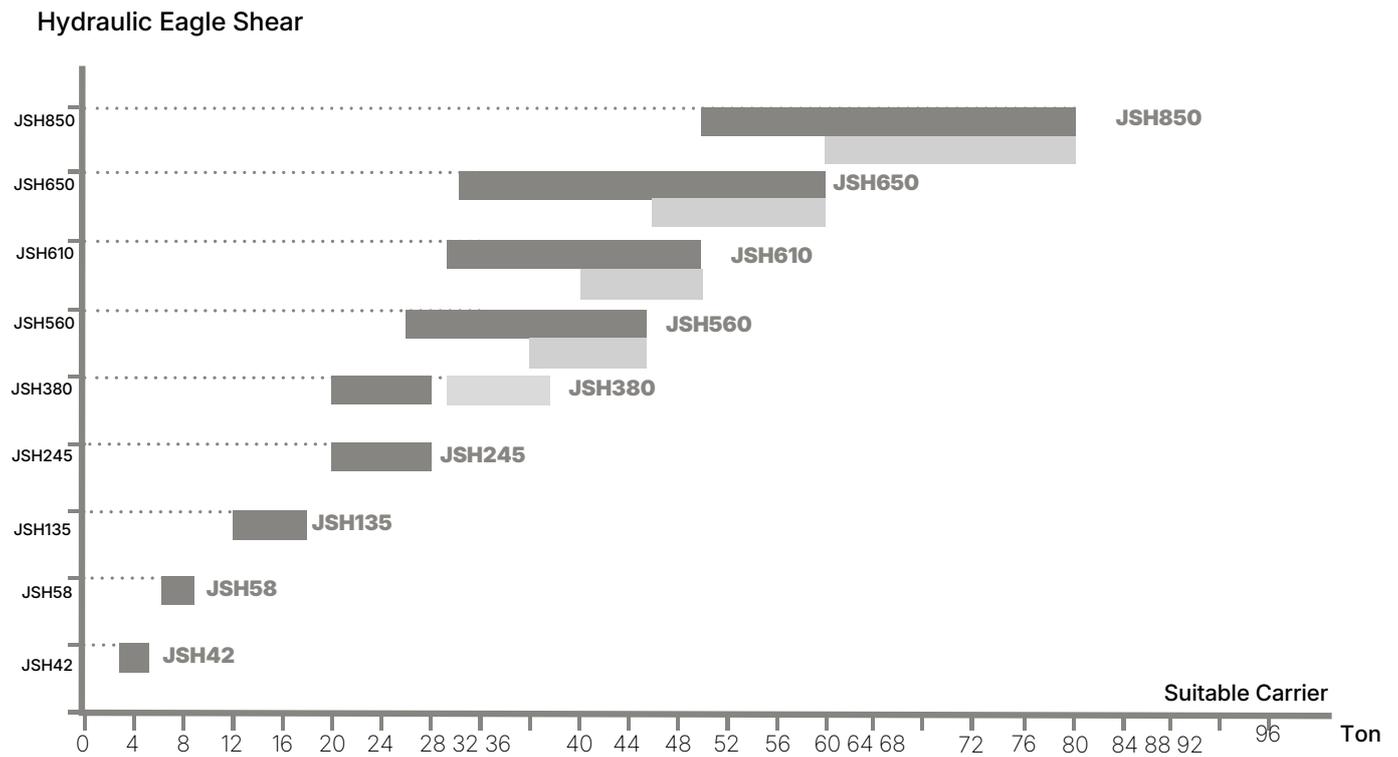

ROTATING PULVERIZER

JRP80-JRP280

For equipments from 5 to 40 ton

Application

The hydraulic crusher is ideal for secondary concrete demolition and construction material recycling, making work easier in projects that require high productivity and precision. It also allows for efficient cutting of reinforcing steel, making this tool a versatile solution for construction and recycling projects.

Key Features

- **Robust structure:** Efficiently lifts and crushes concrete.
- **NM400 steel jaw:** Maximum wear resistance for heavy-duty work.
- **Versatility:** Replaceable teeth and optional 360° rotation system.
- **Low maintenance and long service life:** Reliable performance with minimal upkeep cycles.




| | | JRP67 | JRP140 | JRP220 | JRP280 |
|--------------------------------|-------------------|---------|---------|---------|---------|
| Body Weight | Kg | 670 | 1400 | 2250 | 2660 |
| Opening | mm | 510 | 700 | 750 | 880 |
| Blade Length | mm | 140 | 180 | 180 | 260 |
| Working Flow | Lt./min | 100-150 | 120-180 | 200-250 | 200-250 |
| Working Pressure | Kg/m ² | 250-280 | 280-320 | 300-320 | 300-320 |
| Rotating Motor Flow | Lt./min | 40-60 | 40-60 | 40-60 | 40-60 |
| Rotating Motor Pressure | Kg/m ² | 120 | 120 | 120 | 120 |
| | kN | 800 | 1500 | 1900 | 2800 |
| Middle Crusher Force | kN | 430 | 735 | 915 | 1500 |
| Tip Crusher Force | kN | 300 | 565 | 750 | 900 |
| Suitable for | ton | 5-10 | 12-18 | 20-30 | 22-40 |

ROTATING PULVERIZER

» SUITABLE FOR

Rotating Pulverizer

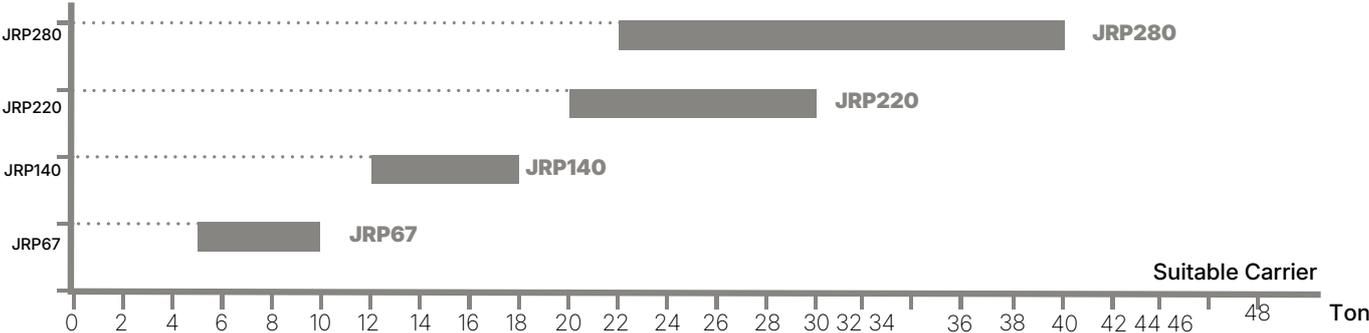

CAR DISMANTLING

JHSD94

For equipments from 12 to 25 ton

Application

Hydraulic shear for vehicle dismantling and demolition, suitable for cars, buses, and trucks. Ideal for efficient and safe vehicle recycling when mounted on excavators.

Key Features

- 360° rotating hydraulic unit for flexible and precise cutting
- Reverse-mounted hydraulic cylinder with speed valve for high efficiency
- High-quality blades, durable design, and long service life




| JHSD94 | | |
|-----------------------|---------|---------|
| Body Weight | Kg | 905 |
| Opening | mm | 750 |
| Cutting Depth | mm | 280 |
| Rotation Diameter | mm | φ593 |
| Working Flow | Lt./min | 180-200 |
| Working Pressure | Kg/m2 | 240-280 |
| Hose Diameter | inch | G1/2 |
| Cylinder Diameter | mm | 125 |
| Cylinder Rod Diameter | mm | 80 |
| Max Cutting Force | Ton | 115 |
| Suitable for | ton | 12-25 |

CAR DISMANTLING

» SUITABLE FOR

Car Dismantling

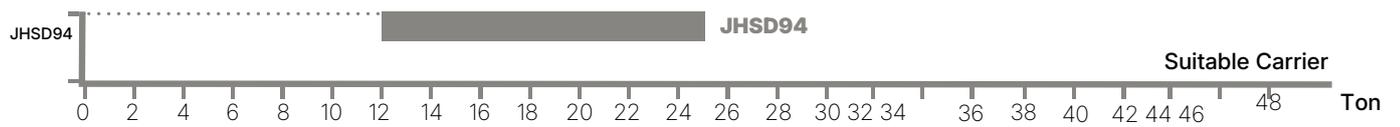

HYDRAULIC THUMB

J S P T 04 - J S P T 10

For equipments from 5 to 35 ton

Application

Auxiliary attachment designed for efficient material grabbing and handling, providing greater control and productivity in loading, demolition, and recycling operations.

Key Features

- Manufactured from Q345 manganese steel, ensuring **high strength, durability, and excellent corrosion resistance.**
- **High-performance hydraulic cylinder** with honed tube for smooth and reliable operation.
- Robust design engineered for **demanding applications and harsh working conditions.**




| | | J S P T 04 | J S P T 06 | J S P T 08 | J S P T 10 |
|------------------------------|-------------------|------------|------------|------------|------------|
| Body Weight | Kg | 210 | 445 | 580 | 970 |
| Working Flow | Lt./min | 50-100 | 100 | 100-140 | 130-180 |
| Working Pressure | Kg/m ² | 120-160 | 200-240 | 240-280 | 300-320 |
| Hose Diameter | inch | G1/2 | G1/2 | G1 | G1 |
| Cylinder Diameter | mm | 80/100 | 90/115 | 90/115 | 100/127 |
| Cylinder Rod Diameter | mm | 56 | 60 | 60 | 70 |
| Suitable for | ton | 5-9 | 9-16 | 18-26 | 28-35 |

HYDRAULIC THUMB

» SUITABLE FOR

Car Dismantling

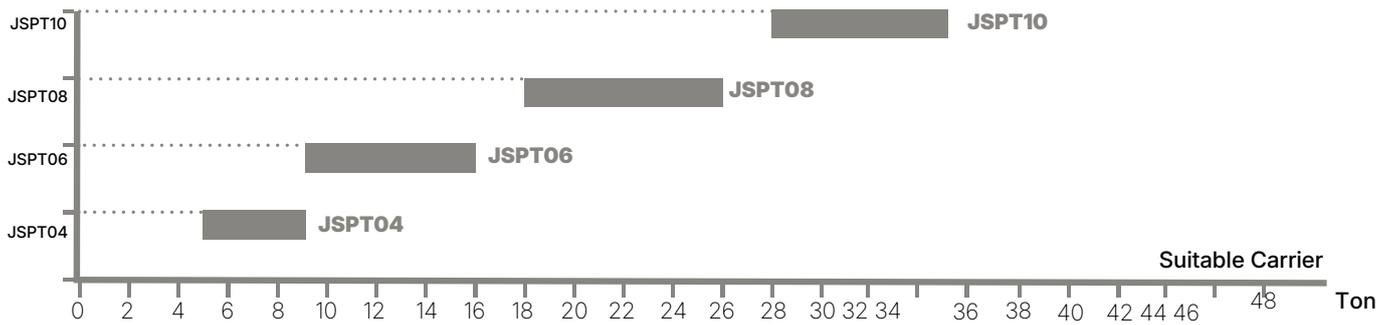

PULVERIZER

JFP80-JFP230

For equipments from 6 to 30 ton

Application

The hydraulic crusher is ideal for secondary concrete demolition and construction material recycling, making work easier in projects that require high productivity and precision. It also allows for efficient cutting of reinforcing steel, making this tool a versatile solution for construction and recycling projects.

Key Features

- **Robust structure:** Efficiently lifts and crushes concrete.
- **NM400 steel jaw:** Maximum wear resistance for heavy-duty work.
- **Versatility:** Replaceable teeth and optional 360° rotation system.
- **Low maintenance and long service life:** Reliable performance with minimal upkeep cycles.



Pulverizer




Pulverizer Magnet

| | | JFP80 | JFP230 | JFP245 | JFPM189 | JFPM227 |
|------------------------------|-------------------|---------|---------|---------|---------|---------|
| Body Weight | Kg | 480 | 1650 | 2050 | 2000 | 2330 |
| Opening A | mm | 534 | 830 | 1000 | 800 | 830 |
| Working Flow | Lt./min | 100 | 200 | 200 | 200 | 200 |
| Working Pressure | Kg/m ² | 200 | 300 | 320 | 300 | 300 |
| Hose Diameter | mm | G1/2 | G1 | G1 | G1 | G1 |
| Cylinder Diameter | mm | 140/170 | 190/230 | 300/245 | 180/220 | 190/230 |
| Cylinder Rod Diameter | j | 170 | 170 | 240 | 320 | 450 |
| Crushing Force | KN | 400 | 820 | 1100 | 800 | 820 |
| | V | | | | DC24V | DC24V |
| Magnet Diameter | mm | | | | 600 | 600 |
| Suitable for | ton | 6-9 | 20-30 | 26-35 | 20-24 | 26-30 |

PULVERIZER

» SUITABLE FOR

Pulverizer

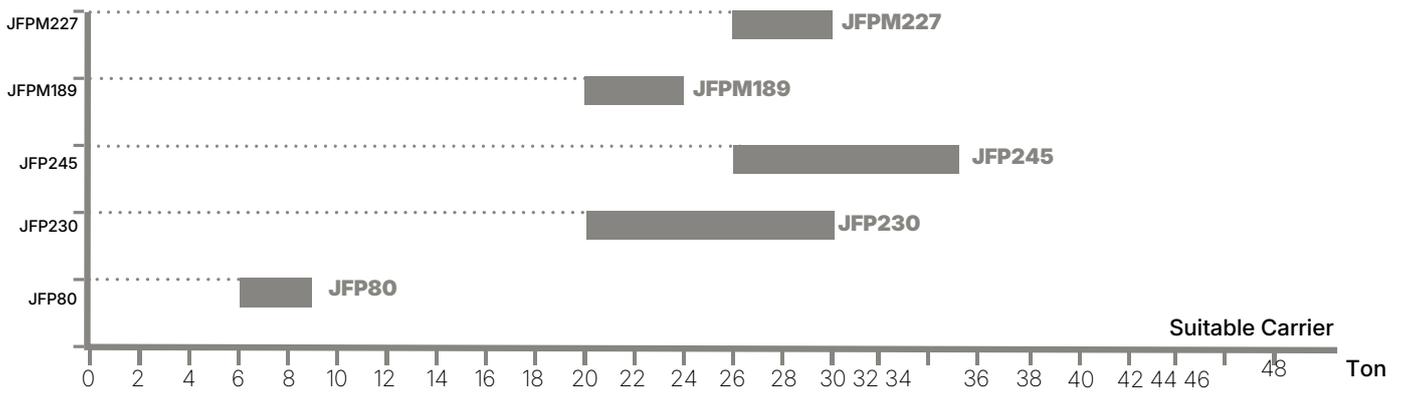

ROTATING DEMOLITOR GRAPPLE

J G H56-J G H320

For equipments from 2 to 35 ton

Application

Ideal for large-scale material loading and unloading, as well as industrial handling operations.

Key Features

- **NM450 steel:** high strength and durability. **360°**
- **rotation:** electric or hydraulic control for flexible handling.
- **Oil cylinder with balance valve:** ensures consistent gripping force and safety.
- **Integrated design with outer protection:** maintains synchronization and prolongs service life.




| | | JGH01 | JGH02 | JGH04 | JGH06 | JGH08 |
|--------------------------------|-------|---------|---------|---------|---------|---------|
| Body Weight | Kg | 273 | 380 | 455 | 800 | 1380 |
| Rotation Angle | ° | 360 | 360 | 360 | 360 | 360 |
| Motor Pressure | bar | 160 | 200 | 200 | 170 | 190 |
| Motor Necessary Flow | L/min | 10 | 12 | 12 | 25 | 35 |
| Motor Qty | | 1 | 1 | 1 | 2 | 2 |
| Cylinder Pressure | PC | 300 | 300 | 300 | 350 | 350 |
| Cylinder Qty | bar | 1 | 1 | 1 | 1 | 2 |
| Grab Tip Clamping Force | PC | 12 | 23 | 24 | 35 | 55 |
| | KN | | | | | |
| Open/Close Time | s | 2.5/3.5 | 2.5/3.5 | 2.5/3.5 | 2.5/3.5 | 2.5/3.5 |
| Suitable for | ton | 2-4 | 4-8 | 8-11 | 11-22 | 22-35 |

ROTATING DEMOLITOR GRAPPLE

» SUITABLE FOR

Rotating Demolitor Grapple

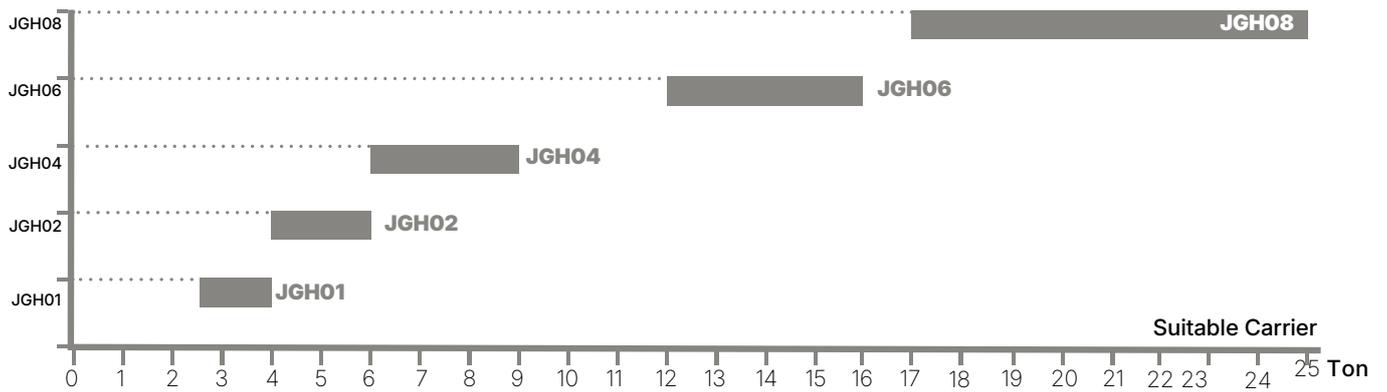



NEVO

ONE-STOP-SHOP



Hantverksvägen 2,
954 33 Gammelstad,
Luleå



0920 25 16 00



info@nevomaskin.com